


AN-SL-X SPECIFICATIONS

Technical Indexes


Power	60W	80W	100W	120W	150W	200W
LED	80pcs 3030	80pcs 3030	120pcs 3030	120pcs 3030	120pcs 5050	120pcs 5050
Luminous Flux	10000lm	13000lm	16700lm	20000lm	25000lm	33000lm
LiFePO4 Battery	12.8V/42AH	12.8V/57AH	12.8V/63AH	12.8V/72AH	12.8V/90AH	25.6V/66AH
Mono Solar Panel	18V120W	18V140W	18V160W	18V180W	18V200W	36V260W
Install Height	5-8m	6-9m	7-10m	7-10m	8-12m	8-12m
Material	Aluminium alloy + PMMA					
Solar Charging Time	6-8 hours by bright sunlight					
Lighting Time In Rainy Day	10 days					
Lighting Mode	12hrs motion sensor control (Bright lighting 30secs when people move through the light)+Remote Controller					
PIR	120°, >8m					
IP / IK Class	IP 65 / IK 10					
Work Temperature	-25°C to 65°C					

AN-SL-X PRODUCT ADVANTAGE

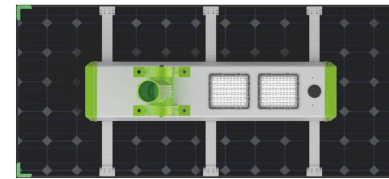


01 DOUBLE-SIDED SOLAR PANEL

Maximumly improved the power generation by 30%-50%

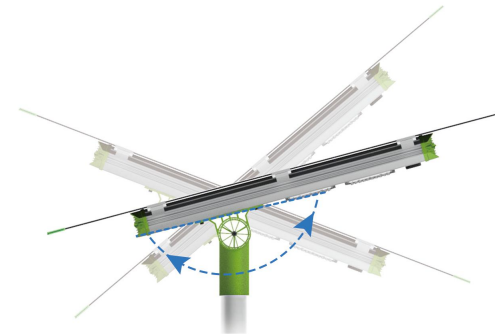

02 ADJUSTABLE ANGLE BRACKET

180° arbitrary adjustment

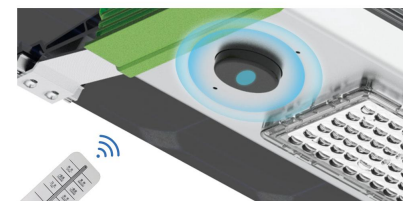

03 REMOTE CONTROLER

4 lighting modes for optional